

supervac[®]

intelligent vacuum packaging




Supervac GK 289 / GK 290 Double Chamber Vacuum Packaging Machines

- All stainless steel construction.
- Biaxial Sealing with Spring loaded Resistance Wires.
- On wheels.
- DIGIMAT 5 Microprocessor control unit.
- Integral vacuum pump with motor protection.

GK 289 / 290

- Reliable and easy to service.
- Hygienic design – easy to clean.
- Simple to operate.

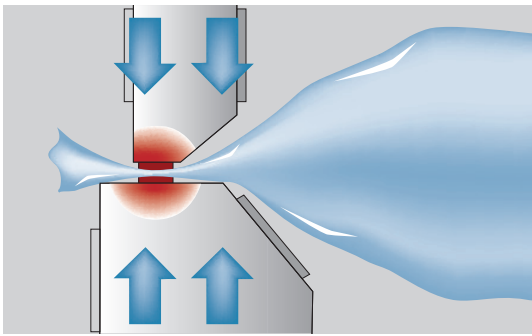

GK 289 / GK 290 Compact and Reliable

Vacuum packaging of perishable food – fresh and processed meat, sausages, fish, cheese, prepared dishes and more – no loss of weight, longer shelf life.

Standard Features:


- Biactive Sealing and Spring Loaded Resistance Wires (illustrated).
- Lid levers on Ball Bearings.
- Withdrawal of Bag Overlength.
- DIGIMAT 5, Microprocessor control unit (20 programmes).

Optional Features:

- Gas flushing for packaging soft products, e.g. sandwiches, cheese, pasta. There are 4 gas nozzles per seal bar.
- Expansion Cushion with Snap-out Frame.
- Additional Sealing Pressure – 4 bar total sealing pressure. Recommended for machines with cut-off perforation.
- Cut-off Perforation.
- Inclined filler plates for liquids or granular products.

Biactive Sealing and Spring Loaded Resistance Wires are standard. Tough and reliable seals despite wrinkles, moisture and grease in the seal area. Springs keep the resistance wires taut during continuous production, increasing the working life of resistance wires and teflon.

Technical Data:		GK 289			GK 290	
Outside dimensions		1610 x 1025 x 1090 mm (63 x 40 x 43")			1610 x 1250 x 1150 mm (63 x 49 x 45")	
Chamber dimensions		795 x 760 x 180 mm (31 x 30 x 7")			795 x 760 x 300 mm (63 x 49 x 45")	
Sealing length		4 x 650 mm (4 x 25.5")			4 x 650 mm (4 x 25.5")	
Distance between seal bars		660 mm (26")			660 mm (26")	
Integral Busch vacuum pump		160 m ³ /h	200 m ³ /h	250 m ³ /h	200 m ³ /h	250 m ³ /h
Power consumption	3Ph 50Hz	4.0 kW	4.0 kW	5.5 kW	4.0 kW	5.5 kW
	3Ph 60Hz	5.5 kW	5.5 kW	7.5 kW	5.5 kW	7.5 kW
Weight approx.		520 kg	520 kg	520 kg	530 kg	530 kg

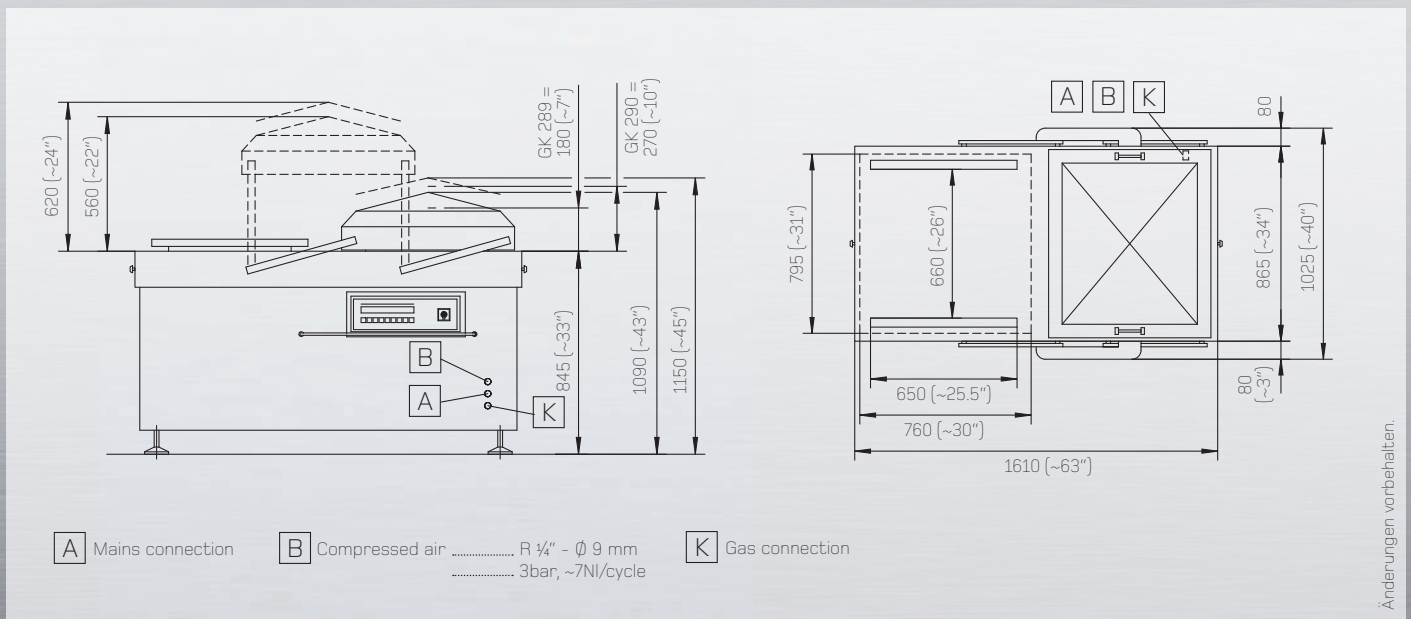

supervac®

Supervac Ges.m.b.H.
Jochen-Rindt-Straße 3 | A-1230 Wien | Austria
Tel.: +43 1 616 28 80 | Fax.: +43 1 616 28 84
E-Mail: office@supervac.at | www.supervac.at

Änderungen vorbehalten.

Copyright © 2010 Supervac Ges.m.b.H. All rights reserved.
04/2010 | Supervac is a registered trademark of Supervac Ges.m.b.H.